


SMX-200 EXPANSION CARD

Mini PCIe 4-port Isolated RS-232/422/485 Serial Card, -40°C to 85°C

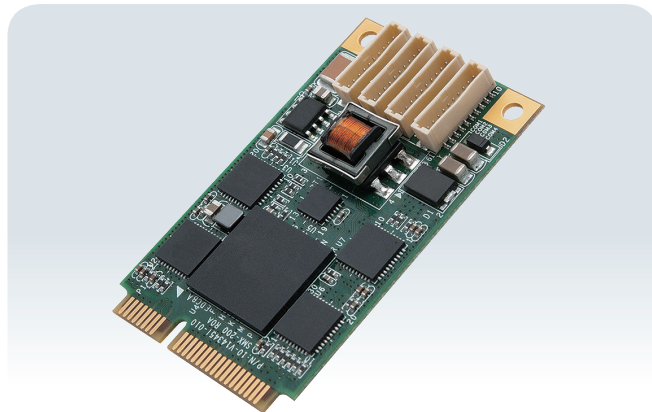

Features

- 4-port high-speed RS-232/422/485
- Each serial channel supports up to 2.5kV Isolation
- Up to 31.25Mbps super fast data transmission
- -40°C to 85°C Operating Temperature
- PCI Express® Mini Card 1.2 compliant, compact size
- Interrupt Status Register for Performance Enhancement




Specifications

Serial	
Interface	Mini PCIe
Controller	EXAR XR17V354
Standard	RS-232/422/485 (2.5kV Isolation)
Number of Port	4
Baud Rate	Up to 921.6kbps
FIFOs	256 byte
Flow Control	CTS/RTS, Xon/Xoff
Software Support	
OS	Windows 10, Windows 8.1, Windows 7, Linux
Mechanical	
Dimensions (W x L)	Mini Card : 30mm x 51mm Cable Length : 260mm
Weight	145 g

Environment	
Operating Temperature	-40°C to 85°C (-40°F to 185°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Humidity	5% to 95% Humidity, non-condensing
Relative Humidity	95% @ 85°C
EMC	CE, FCC
Packing List	
1 SMX-200 Serial Card 2 Cable Set 1 Driver CD 1 Screw Kit 2 Bracket	

Dimensions

Unit : mm/ inch

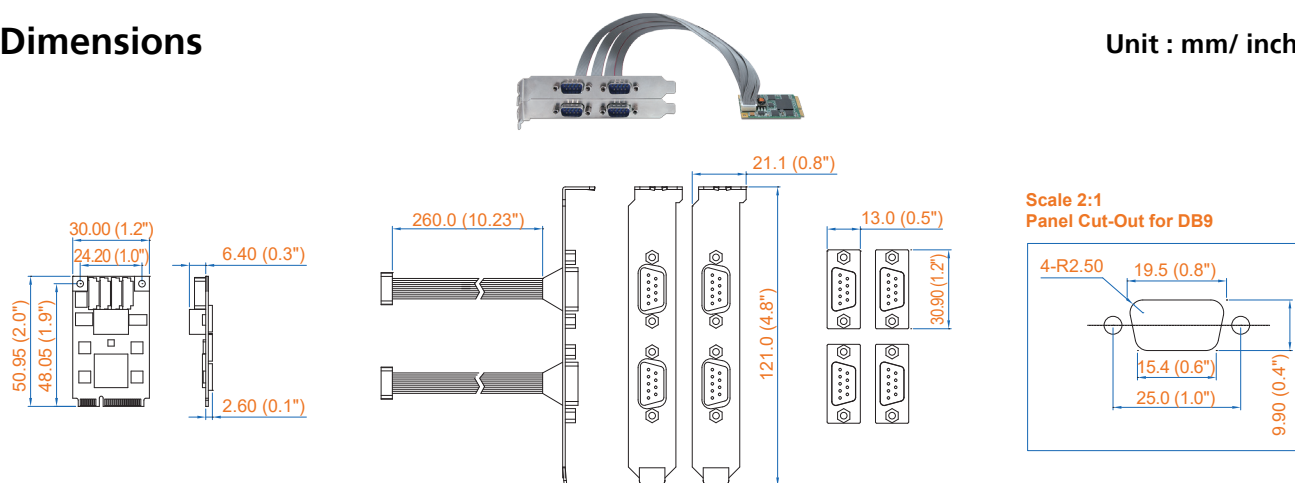

Order Information

SMX-200	Mini PCIe 4-port Isolated RS-232/422/485 Serial Card
---------	--

SMX-200-20171107

* The rights of all brand names, product names and trademarks belong to their respective owners.